

Aqua-Pure®

Models:

EP15, EP25 & EP35R

Drinking Water Replacement Cartridges

Spec # _____

Quantity _____

Applications:

- Sediment / Rust
- Chlorine Taste & Odor
- Cloudiness
- Lead (EP25 & EP35R Only)
- *Cryptosporidium Parvum* Cysts
- VOCs, TTHM and MTBE (EP35R only)

At a Glance:

- Compatible with some competitive systems
- Low cost, higher efficiency filtration
- For use in multiple filtration applications
- High flow design

Design
Compatible with
Some Competitive
Filtration
Systems



EP15



EP25



EP35


Product Benefits:

- Design compatible with current and previous competitive systems
- Specially formulated blend of high adsorption carbon media for the reduction of unwanted chlorine taste and odor
- Premium depth filtration provides long cartridge life and high sediment reduction efficiency
- Particulate reduction down to 0.5 micron nominal
- Submicron filtration helps reduce water-borne *cryptosporidium* cyst parasites
- No preactivation required
- Sanitary Quick Change (SQC) encapsulated cartridges reduce contamination of media during change-outs
- Suitable for drinking water, cooking water and food applications
- Less frequent cartridge change-outs than typical drop-in style cartridges means greater cost savings
- Manufactured from FDA CFR-21 and/or NSF compliant materials

Physical Specifications:

Model No. (Part No.)	Dimensions		Service Flow Rate	Water Pressure	Water Temperature	Capacity	Efficiency
	Length	Diameter					
EP15 (55924-02)	14-3/8" (36.5 cm)	3-3/8" (8.6 cm)	0.5 gpm (1.9 lpm)	25 - 125 psi (172 - 862 kPa)	40 - 100 °F (4.4 - 37.8 °C)	2,000 gallons (7,571 liters)	0.5 micron
EP25 (55924-03)			0.6 gpm (2.3 lpm)			1,150 gallons (4,353 liters)	1.0 micron
EP35 (55924-04)			0.5 gpm (1.9 lpm)			350 gallons (1,325 liters)	0.5 micron

Aqua-Pure®

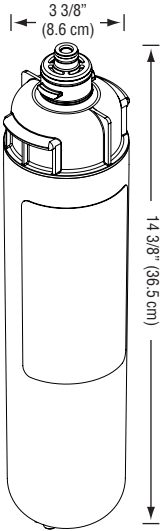

EP15, EP25 & EP35R

Spec # _____

Quantity _____

Model Number _____

Part Number _____


Product Specifications:

- System is manufactured from FDA CFR-21 compliant materials
- System is tested and listed in accordance with NSF Standard 42 and 53
- System has a maximum operating pressure of 125 psi (862 kPa) and operating temperature of 100 °F (37.8 °C)

	EP15	EP25	EP35R
Lead		✓	✓
Chlorine Taste and Odor	✓	✓	✓
Turbidity	✓		✓
Sediment/Rust	✓	✓	✓
Cryptosporidium Parvum Cysts	✓	✓	✓
Mold & Algae	✓	✓	✓
Asbestos		✓	✓
Atrazine		✓	
Benzene		✓	
Carbofuran		✓	
Benzene		✓	
Lindane		✓	
Mercury		✓	
P-Dichlorobenzene		✓	
MTBE			✓
TTHM			✓
VOCs			✓

Easy Installation:

CAUTION: Diagram shown is for reference purposes only. Read installation and operation manual prior to installing the unit.

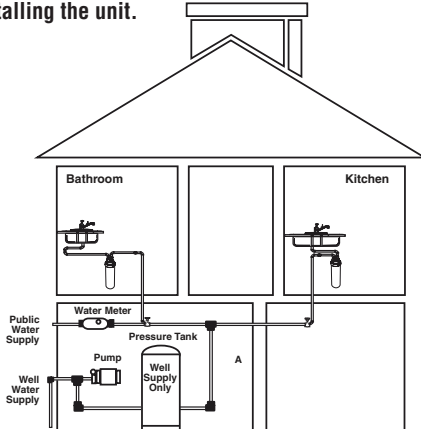

⚠ WARNING: To reduce the risk associated with the ingestion of contaminants: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts. EPA Establishment #070595-CT-001

CAUTION

To reduce the risk associated with property damage due to water leakage:
 • Read and follow Use Instructions before installation and use of this system.

3M Purification Inc. recommends regularly scheduled maintenance and replacement of the filter cartridge(s) in order for the product to perform as advertised/sold. **The disposable filter cartridge MUST be replaced every 6 months, at the rated capacity or sooner if a noticeable reduction in flow rate occurs.**

Limited Warranty:

3M Purification Inc. warrants this Product will be free from defects in material and manufacture for the period of one (1) year from the date of purchase: This warranty does not cover failures resulting from abuse, misuse, alteration or damage not caused by 3M Purification Inc. or failure to follow installation and use instructions. No warranty is given as to the service life of any filter cartridge or membrane as it will vary with local water conditions and water consumption. **3M PURIFICATION INC. MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOMER OR USAGE OF TRADE.** If the Product fails to satisfy this Limited Warranty during the warranty period, 3M Purification Inc. will replace the Product or refund your Product purchase price. This warranty does not cover labor. **The remedy stated in this paragraph is Customer's sole remedy and 3M Purification Inc.'s exclusive obligation. For additional information, see the entire Limited Warranty located in the product Installation and Operating Instruction Manual.**

Limitation of Liability. 3M Purification Inc. will not be liable for any loss or damage arising from this 3M Purification Inc. product, whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability. Some states and countries do not allow the exclusion of limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

Distributed by:

3M

3M Purification Inc.
 400 Research Parkway
 Meriden, CT 06450 U.S.A.
 Toll Free: 1.800.222.7880
 Worldwide: 203.237.5541
 Fax: 203.238.8701
 www.aquapure.com • www.3mpurification.com

Aqua-Pure is a trademark of 3M Company used under license
 3M is a trademark of 3M Company.
 © 2010 3M Company. All rights reserved.
 70-0201-9246-7
 REV 0910