


DuraSystem® Toilet in-wall tank & carrier, Standard #
WD1022000090 / WD1022000091

| < 23 1/4" Inch > |

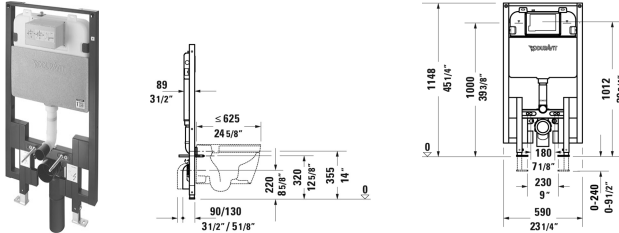

Toilet in-wall tank & carrier, Standard	Dimension	Weight	Order number
<p>WaterSense® listed, For 2"x4" and 2"x6" wall installation, for toilets with a projection of <= 24 5/8", adjustable feet 0" - 9 1/2", SensoWash ready, mechanical front flush actuation, includes in-wall tank, marking of filling height, dual flush, insulated against condensation, Scope of delivery, HDPE wall-mounted toilet connection bend DN 90/90, PE wall-mounted toilet connection set DN 90, wall-mounted mounting rods M12, mounting hardware included, 2 bolt caps, cUPC® listed*</p>			
<p>Colors</p>			
<p>00 White</p>			
<p>Variant</p>			
<p>1.6/0.8 gpf, ADA compliant</p>	<p>23 1/4" x 45 1/4" Inch</p>	<p>35.3 lb</p>	<p>WD1022000090</p>
<p>1.28/0.8 gpf, ADA compliant</p>	<p>23 1/4" x 45 1/4" Inch</p>	<p>35.3 lb</p>	<p>WD1022000091</p>
<p>Infobox</p>			
<p>* # WD1022: Complies with the following standards: ASME A112.6.2, ASSE 1002, ASME A112.1002/CSA B125.12 & ASME A112.19.5/CSA B45.15</p>			
<p>Installation accessories</p>			
<p>Pre-installation set in combination with SensoWash, for in-wall carrier with horizontal support without shower toilet pre-installation/conduit pipe</p>			<p>005072</p>
<p>Suitable products</p>			
<p>Actuator plate A1, for toilet, plastic mechanical actuation, for surface mounted installation, dual flush, mounting frame, mounting hardware included, push rods, front plate plastic</p>	<p>8 1/2" x 5 3/4" Inch</p>	<p>0.7 lb</p>	<p>WD5008</p>

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in inch & mm and are non-binding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.