

GEBERIT SIGMA10 ACTUATORS

For Sigma Concealed Tanks, 2x6 and 2x4 Installations

SPECIFICATIONS

Actuators for concealed tank and carrier system. Actuator flush plates and push buttons shall be molded plastic, zinc die-cast, molded plastic or fabricated stainless steel and plated to guard against scratches. All components shall be compliant with applicable codes and product standards.

FEATURES

- Actuators designed to maintain appearance push after push
- Moving parts are accessible behind actuator flush plate

- Made of molded plastic, zinc die cast or stainless steel and plated
- Available in a variety of unique combinations of finish/color
- Includes mounting frame and hardware

WARRANTY

- One-year limited warranty on manual flush plates
- Brushed Stainless Steel flush plate finish: 5 years (residential); One year: public
- Electronic components: 2 years from installation

Single-Flush Actuators, Sigma 2x6 Installation

Style	Material	Finish	Model No.
	Stainless	Matte Black-Polished	115.758.14.5
		Chrome-Matte Black*	
		Matte White-Polished	115.758.JT.5
		Chrome-Matte White*	
		Brushed Stainless Steel-Polished	115.758.SN.5
	Stainless Steel-Brushed Stainless Steel*		
	Plastic	Brushed Stainless Steel-Polished	115.787.SN.5
		Stainless Steel-Brushed Stainless Steel*	
		Polished Chrome-Matte Chrome-Polished Chrome*	115.758.KH.5
		White-Polished Chrome-White*	115.758.KJ.5
White-Polished Gold-White*		115.758.KK.5	
		Black-Polished Chrome-Black*	115.758.KM.5
		Matte Chrome-Polished	115.758.JQ.5
		Chrome-Matte Chrome*	

Dual-Flush Hands-Free Actuators and Transformer, Sigma 2x6 Installation

Style	Material	Finish	Model No.
	Stainless	Brushed Stainless Steel-Polished	115.890.SN.5
		Stainless Steel-Brushed Stainless Steel* Vandal Resistant (AC Power with manual override)	
		Brushed Stainless Steel-Polished	115.891.SN.5
		Stainless Steel-Brushed Stainless Steel* Vandal Resistant (Battery/DC Power with manual override)	
	Plastic	Polished Chrome-Matte Chrome* (AC Power)	115.907.KH.1
		White-Polished Chrome* (AC Power)	115.907.KJ.1
		White-Polished Gold* (AC Power)	115.907.KK.1
		White-Matte Chrome* (AC Power)	115.907.KL.1
		Black-Polished Chrome* (AC Power)	115.907.KM.1
		Matte Chrome-Polished Chrome* (AC Power)	115.907.KN.1
	Stainless	Brushed Stainless Steel-Polished	115.907.SN.1
		Stainless Steel* (AC Power)	
		Required Transformer for AC powered hands-free actuator (order separately)	115.861.00.1
Plastic	Polished Chrome-Matte Chrome* (Battery)	115.908.KH.1	
	White-Polished Chrome* (Battery)	115.908.KJ.1	
	White-Polished Gold* (Battery)	115.908.KK.1	
	White-Matte Chrome* (Battery)	115.908.KL.1	
	Black-Polished Chrome* (Battery)	115.908.KM.1	
	Matte Chrome-Polished Chrome* (Battery)	115.908.KN.1	
Stainless	Brushed Stainless Steel-Polished	115.908.SN.1	
	Stainless Steel* (Battery)		




* Finishes follow this pattern = Plate-Ring-Button


† Intended for sales and use in California with 1.28 gpf (4.8 lpf) system only

DIMENSIONS


Sigma10 Single-Flush

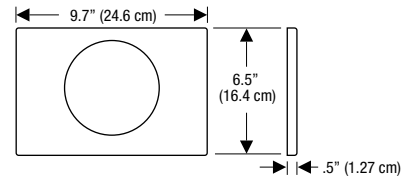

Sigma10 Hands-Free, Dual-Flush with Manual Override

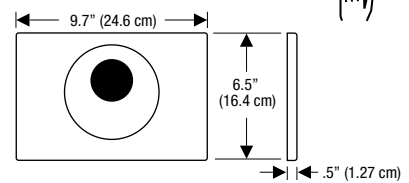

Sigma10 Hands-Free Dual-Flush

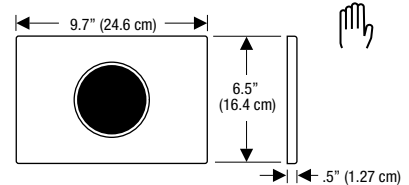

Products marked with comply with the American Disabilities Act (ADA) when installed per the requirements of the latest ADA Accessibility Guidelines (ADAAG) and/or ICC/ANSI A117.1.



ARCHITECT/ENGINEER APPROVAL

Job Name: _____

Date: _____ Quantity: _____

Model Specified: _____

Variations Specified: _____

Customer/Wholesaler: _____








Contractor: _____

Architect: _____


GEBERIT SIGMA10 ACTUATORS

For Sigma Concealed Tanks, 2x6 and 2x4 Installations

Dual-Flush Hands-Free Actuators and Transformer, Sigma 2x4 Installation

Style	Material	Finish	Model No.	
 Sigma 10	Stainless	Brushed Stainless Steel-Polished Stainless Steel-Brushed Stainless Steel* Vandal Resistant (AC Power with manual override)	115.856.SN.1	
		 Required Transformer for AC powered hands-free actuator (order separately)	115.861.00.1	
 Sigma 10	Plastic	Polished Chrome-Matte Chrome* (AC Power)	115.907.KH.1	
		White-Polished Chrome* (AC Power)	115.907.KJ.1	
		White-Polished Gold* (AC Power)	115.907.KK.1	
		White-Matte Chrome* (AC Power)	115.907.KL.1	
		Black-Polished Chrome* (AC Power)	115.907.KM.1	
		Matte Chrome-Polished Chrome* (AC Power)	115.907.KN.1	
	Stainless	Brushed Stainless Steel-Polished Stainless Steel* (AC Power)	115.907.SN.1	
		 Required Transformer for AC powered hands-free actuator (order separately)	115.861.00.1	
		Stainless	 Required lifter for Sigma 2x4 hands- free actuator (order separately)	243.356.00.1
			 Required lifter for Sigma 2x4 hands- free actuator (order separately)	243.356.00.1
	Plastic	Polished Chrome-Matte Chrome* (Battery)	115.908.KH.1	
		White-Polished Chrome* (Battery)	115.908.KJ.1	
White-Polished Gold* (Battery)		115.908.KK.1		
White-Matte Chrome* (Battery)		115.908.KL.1		
Black-Polished Chrome* (Battery)		115.908.KM.1		
Matte Chrome-Polished Chrome* (Battery)		115.908.KN.1		
Stainless	Brushed Stainless Steel-Polished Stainless Steel* (Battery)	115.908.SN.1		
	Stainless	 Required lifter for Sigma 2x4 hands- free actuator (order separately)	243.356.00.1	

Remote Programming Accessory for Hands-Free Actuators

	"Service Handy" remote programming device for Geberit touch-free devices	115.860.00.1
---	---	--------------

* Finishes follow this
pattern = Plate-Ring-Button

† Intended for sales and use in
California with 1.28 gpf (4.8 lpf)
system only

GEBERIT SIGMA10 ACTUATORS

For Sigma Concealed Tanks, 2x6 and 2x4 Installations

HANDS-FREE APPLICATION

- For automatic, "hands free" sensing and flush actuation, in hygienic or ADA compliant applications
- For public or residential spaces
- For low consumption toilets. Dual-flush volumes of 1.6 GPF (6 LPF) and 0.8 GPF (3 LPF) or 1.28 GPF (4.8 LPF) and 0.8 GPF (3 LPF)

HANDS-FREE SPECIFICATIONS


- Stainless steel – Brushed stainless steel
- Detection distance: up to 24 in (60 cm)
- Automatic hygiene flush: 24 h after last flush cycle
- Battery type Alkaline 1.5 V (LR20, "D" cell)*
- Operating voltage: 3 V DC
- User detection time: 7 s
- Manual actuation force < 4.5 lbf (20 N)

HANDS-FREE SCOPE OF SUPPLY

- Cover plate with infrared window (replaceable)
- Infrared control, premounted on fixation frame
- Servo motor, premounted to lifter mechanism
- Fastening material
- Battery box and 2x, "D" alkaline batteries*
- 120 V 60 Hz or 230 V 50 Hz transformer not included. Recommend accessory 115.861.00.1.**

HANDS-FREE FEATURES

- Proven infrared triangulation detection method with background fade-out and auto-calibration to environment
- Low noise servo motor actuates existing gravity flush valve. Motor auto-calibrates to adjust for installation tolerances
- Includes manual override button
- Low battery" warning (2-stage: flashing LED when battery starts to go low; continuous red light when cannot flush)*
- Dynamic flushing time reduction during periods of high traffic to reduce water consumption
- Vandal resistant stainless steel cover plate and independent sensor electronics to prevent tampering
- Pre-installed electrical connectors with cross-polarity protection (one-way connection)
- Battery change can be performed without turning off water*

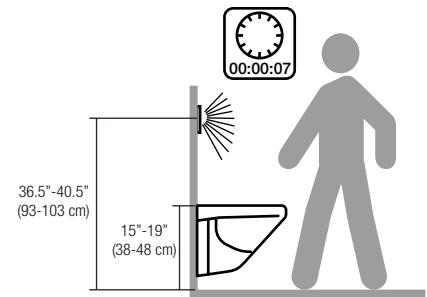

Installing highly reflective surfaces (such as mirrors) in the immediate vicinity of the water closet flush control should be avoided, as these can lead to incorrect releases and malfunctions.

Geberit product is ADA compliant when fixture and actuator are installed at proper heights.

Geberit
2100 S. Clearwater Drive
Des Plaines, IL 60018
USA

P 847-803-7777
F 847-849-1845

www.geberit.us

* Battery version only.
** AC version only.