SHOWER Luna Thermostatic Shower Set (Rough & Trim)



GF4.000A-C9S



# Information

• Thermostatic Shower Spout Flow Rate 2.1 gpm @ 60 psi



### Information

- 18.4 gpm @ 60 psi
- 3/4" universal inlets/outlets with female threads
- Built-in service stops
- Complete serviceability from front of all units
- Supplied with protective plastic cover
- Thermostatic valve uses a paraffin wax cartridge







Steelnox® (Satin Nickel)



G-8041-C9S-T



#### Information


- Single metal handle
- Decorative trim plate
- Use with G-8000 or G-8005 thermostatic rough valve
- To complete package, you must order rough valve
- ADA



Polished Chrome



Steelnox® (Satin Nickel)

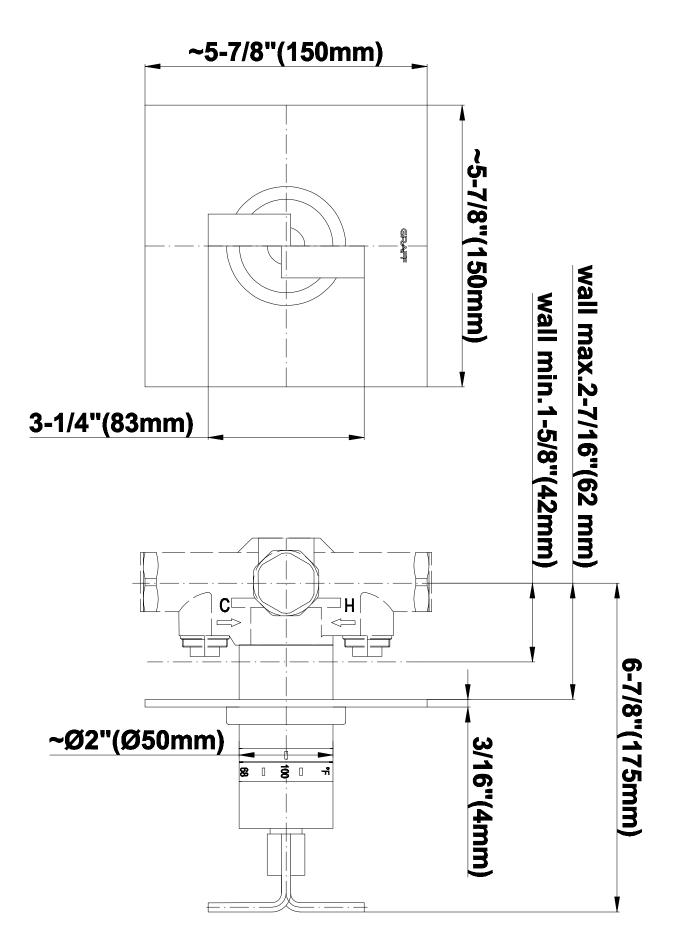





# Information

- 3/4" universal inlets/outlets with female threads
- Supplied with protective plastic cover








Steelnox® (Satin Nickel)



G-8095-C9S-T

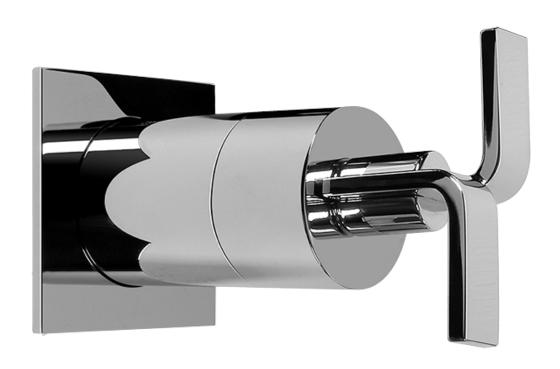

#### Information


- Single metal handle
- Decorative trim plate
- Use with G-8070 or G-8075 thermostatic stop/volume control rough valve
- To complete package, you must order rough valve
- ADA




Polished Chrome



Steelnox® (Satin Nickel)

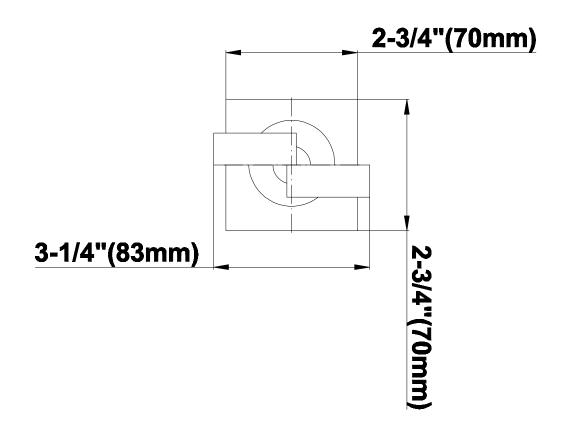

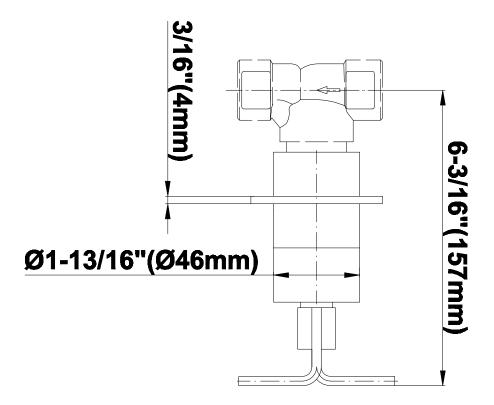










Polished Chrome



Steelnox® (Satin Nickel)

# G-8700 LUNA Series

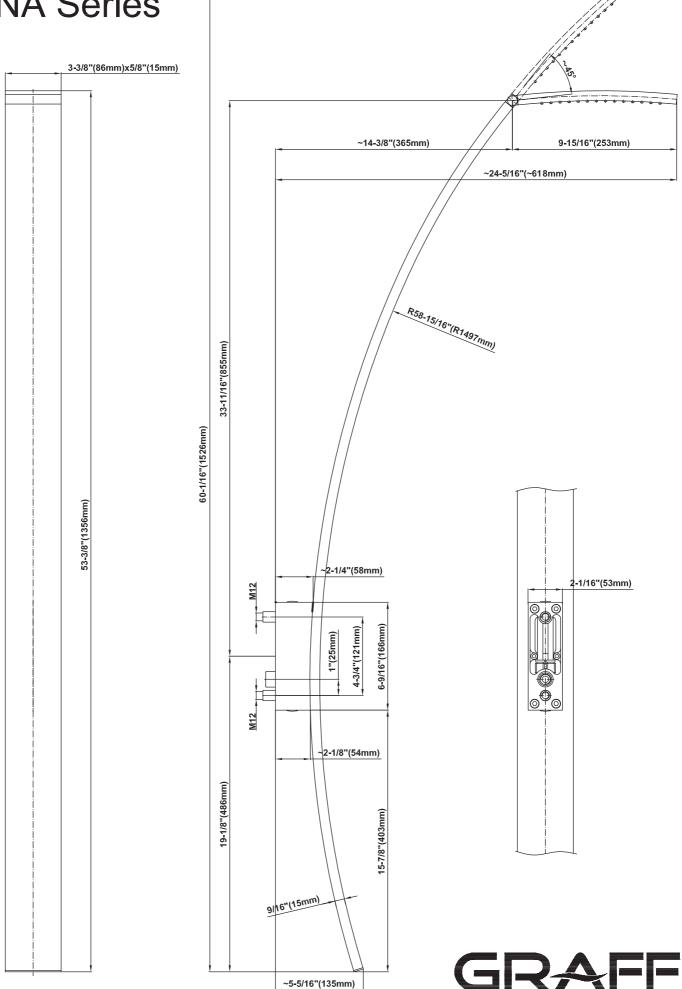







Polished Chrome



Steelnox® (Satin Nickel)

# G-8705

