



model H1117LN.8HO2

ADA Chilled Dual Wall Mount Touchless Fountain

FEATURES & BENEFITS

ADA COMPLIANCE

ADA-compliant dual-height high low drinking fountain required for wheel chair use, and for the standing person.

CONSTRUCTION

One-piece drinking fountains with low-profile design made of 14 gauge Type 304 stainless steel with 1/4" (.6 cm) thick stainless back plates welded in, and vandal-resistant stainless bottom plates.

MOUNTING

Heavy-duty 16-gauge galvanized steel mounting frame with welded-in heavy-duty 10 gauge mounting plate with pre-punched mounting holes provides the sturdy hidden support needed for the Hi-Lo configuration of this unit. Further convenience is given to the chiller with the integral fold-out shelf.

BUBBLER HEADS

Polished chrome-plated brass bubbler head with integral 11/16" dia. basin shank and stainless anti-rotation roll pin for vandal resistance strength. Shielded, angled stream opening provides a steady, sanitary source of drinking water at .45 gpm

FOUNTAIN VALVES

Fountain incorporates touchless sensor operated stainless steel solenoid valves controlled by a transformer for hands-free operation. A pressure regulator is used to adjust the bubbler flow according to incoming water pressures.

TAMPER RESISTANT

30-second obstruction time-out to reduce tampering of sensor.



SPECIFICATIONS

Model H1117LN.8HO2 electric Hi-Lo touchless wall mounted ADA water cooler shall include dual 14 gauge Type 304 Stainless Steel satin finish basins, touchless sensor operated stainless steel solenoid valves with 30-second obstruction time-out controlled by a transformer, in-line strainer and flow adjustment, 100% lead-free waterways, polished chrome-plated brass vandal-resistant bubbler heads, and polished chrome-plated vandal-resistant waste strainers. Unit shall also include vandal-resistant stainless bottom plates, stainless steel satin finish back panel and louvered intrusion-proof grille, high and low fountain mounting levels, and 1-1/4" NPT concealed all cast-brass traps. The design allows the unit to be mounted to meet ADA or Child ADA specifications. The R-134 refrigeration system is hermetically sealed and delivers a minimum of 8 gph (30.3 L) of water at 50° F (10° C) cooled from 80° F (26.7° C) inlet water at 90° F (32.2° C) ambient. 115 Volts, 60Hz, rated watts: 370, full load amps: 5

REQUIRES MODEL HCR8 and MTGFR.LG PRICED SEPARATELY.

OPTIONS

Bottle Filler: Model 1920HO, bottle filler can be a stand alone station, or mounted above Haws 1001, 1011, 1107L, 1109, 1117L, and 1119 series drinking fountain models.

Cane Detection, Floor Mounted: Model SK6, floor mounted cane detection for the Haws Hi-Lo drinking fountains.

Water Filter: Model 6426, 12" x 2" (30.5 x 5.1 cm), in-line lead removal element that reduces lead from incoming water supply.

Custom Logo Panel: Standard Model 6475 comes with "Hydration By Haws™" logo. Customize the panel with your choice of logo, slogan, or graphic. For customization, call 888-640-4297. cane detection for the Haws Hi-Lo drinking fountains.

For more information, visit www.hawsc.com or call (888) 640-4297.

FOR INDOOR USE ONLY APPLICATIONS

Specifically, this type fountain may be placed in settings such as: schools, office buildings, shopping malls, and other indoor environments where there is a demand for a chilled water source and/or wheel chair access. Model meets all current Federal Regulations for the disabled including those in the Americans with Disabilities Act. Haws manufactures drinking fountains and electric water coolers to be lead-free by all known definitions including NSF/ANSI Standard 61, Section 9, NSF/ANSI 372, California Proposition 65, and the Federal Safe Drinking Water Act. Product is compliant to California Health and Safety Code 116875 (AB 1953-2006). Haws electric water coolers comply with ARI Standard 1010 and ANSI A117.1, and are listed by Underwriter Laboratories to U.S. and Canadian standards.




- ADULT WHEELCHAIR HEIGHT: SEE SHEET 2 FIG 2

ADULT STANDING HEIGHT: SEE SHEET 2 FIG 3
WASTE: 24 3/4" (983 mm)


WASTE: 34-3/4" (883mm)

FOUNTAIN: 32-1/2" (826mm)
BUBBLER: 39-3/8" (972mm)

NOTES CONTINUED ON SHEET 2 OF 2

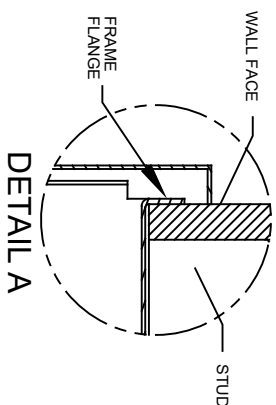

**IMPORTANT: MOUNTING
FRAME MUST BE INSTALLED
SO THAT LIP OF FRAME SITS
AGAINST FINISHED WALL FACE**

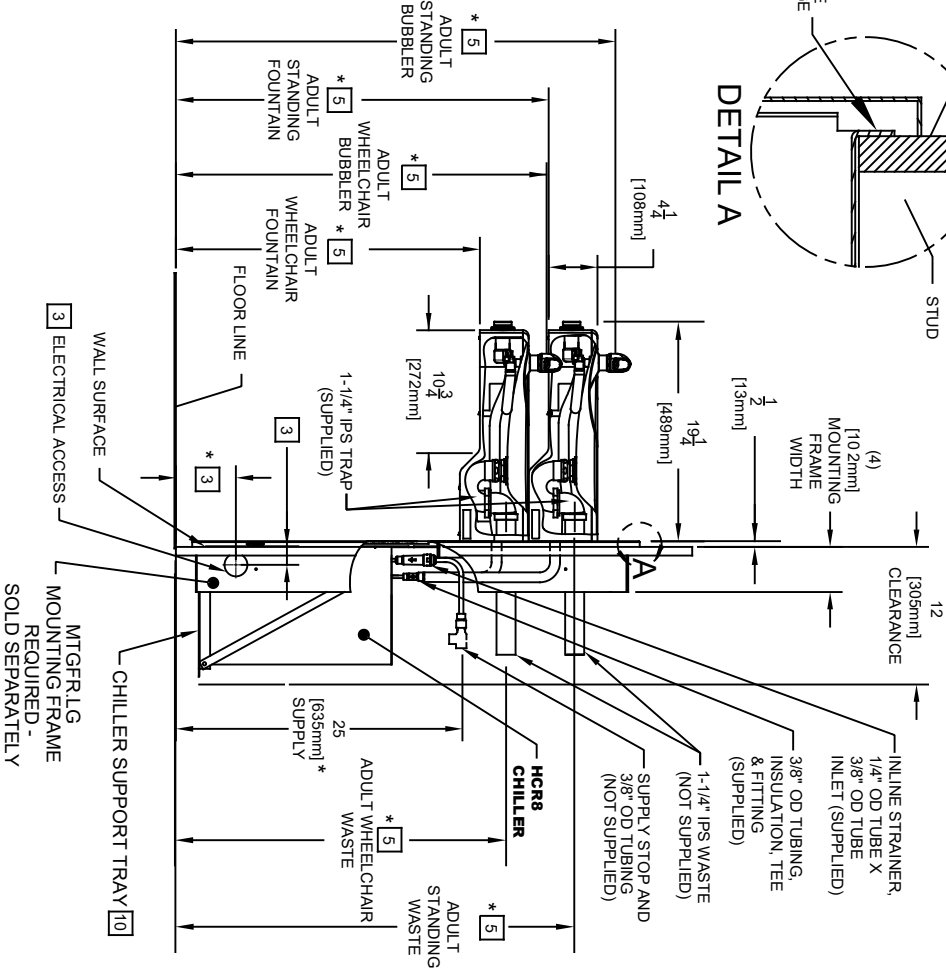

1455 KLEPPE LANE

SPARKS, NEVADA 89431

(775) 359-4712 FAX (775) 359-7424

E-MAIL: HAWSCO@HAWSCO.COM

WEBSITE: WWW.HAWSCO.COM

PART NUMBER

05100011

REVISION

2

7			
---	--	--	--

SAISON	SIZE: A	SHEET 1 OF 1
--------	---------	--------------

Corporation

corporation.

MODEL(S)

H1117LN.8

ECN NO. 5671	REVISED PER ECN: 5671	BY: DP
DRAWN: DP	DATE: 03/24/21	CHKD: FV
APPROVED:	DATE:	

DP	06/21/21
----	----------

SCALE:	N/A	DRAWING TYPE
--------	-----	--------------

INSTALLATION



SIZE: A	SHEET 1 OF
---------	------------

27

SHEET 1 OF 1

NOTES:

- [6] USE SHADED HOLES TO MOUNT BOWLS AT INDICATED POSITIONS.
- 7. REFER TO SHEET 1 OF 2 NOTE 5, FOR INSTALLED FOUNTAIN DIMENSIONS.
- [8] INSERT 5/16"-18 PANEL NUT RETAINERS FROM OPPOSITE SIDE AT LOCATIONS INDICATED (SHOWN BY DARKENED HOLES). USE THE UPPER OUTERMOST HOLES ON THE LEFT AND LOWER OUTERMOST HOLES ON THE RIGHT.
- [9] TO INSERT OR REMOVE NUT RETAINERS: SNAP NUT RETAINERS INTO INDICATED LOCATIONS. IF REMOVAL IS REQUIRED, FIRST REMOVE SCREWS AND THEN SQUEEZE CLIPS ON NUT RETAINER TO POP OUT.
- [10] ALIGN HOLES IN CHILLER SUPPORT TRAY WITH HOLES IN FRAME AND FASTEN WITH #10 SHEETMETAL SCREWS (SEE SHEET 1).

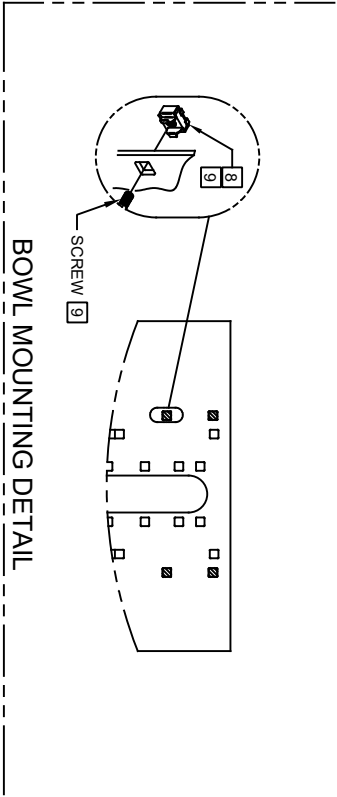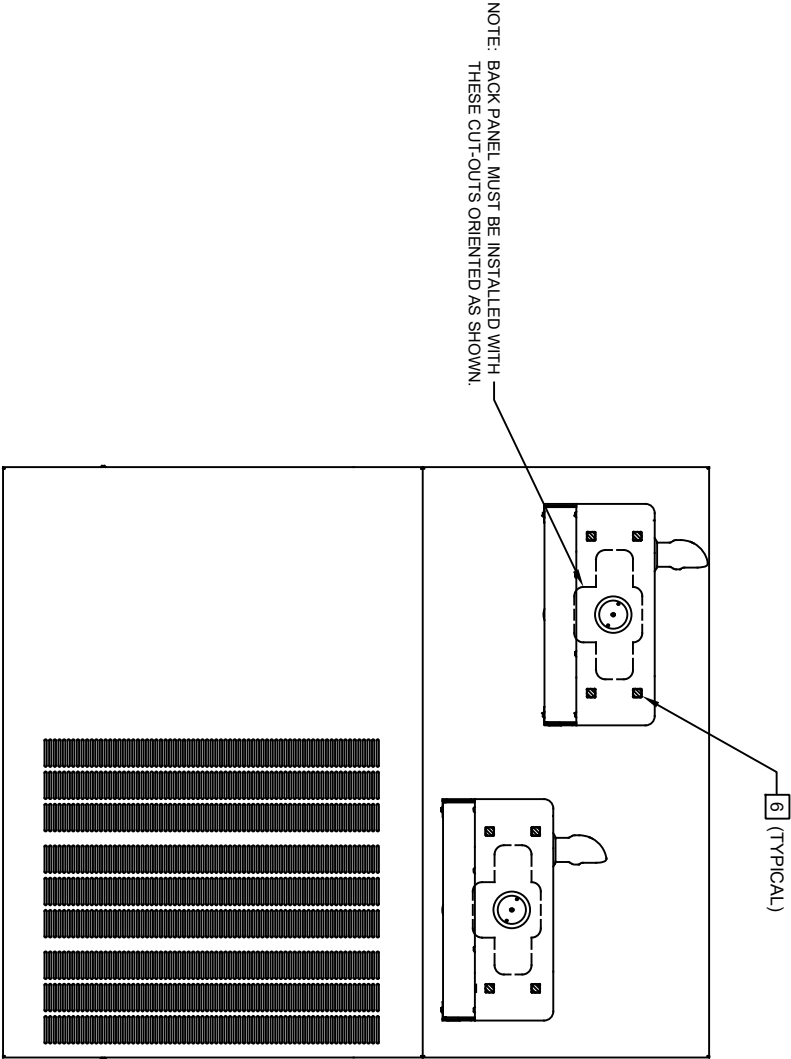

ADULT STANDING / ADULT WHEELCHAIR

BOWL MOUNTING LOCATIONS

1456 KLEPPE LANE				SPARKS, NEVADA 89431			
(775) 359-4712 FAX (775) 359-7424				E-MAIL: HAWS@HAWS.CO.COM			
WEBSITE: WWW.HAWS.CO.COM				PART NUMBER			
MODEL(S)				H1117LN.8			
ECN NO. REVISED PER BY:				DATE: CHK'D:			
5671 ECN. 5671 DP				03/24/21 FV			
DRAWN: DP				DATE: SCALE: N/A			
APPROVED: DP				DRAWING TYPE: INSTALLATION			
06/21/21				SIZE: A			
SHEET 2 OF 2				REVISION			
2				0510001192.D			