



260.2705 | 3/4" Thermostatic Valve With 3-Way Diverter & Integrated Volume Control







Valve [TVH.2717F] + Trim [260.2693T**]

SPECIFICATIONS:

- Turn right knob to control temperature.
- Turn left knob to control water flow.
- Thermostatic Valve Flow Rate 8.0 GPM @ 60 PSI
- Extension Available TVH.4101E**
- 3 Output

STANDARDS:

• ASME A112.18.1 / CSA B125.1

CALGreen Compliant




Legislation Compliance



ZeroDrip Technology




Technical Diagram

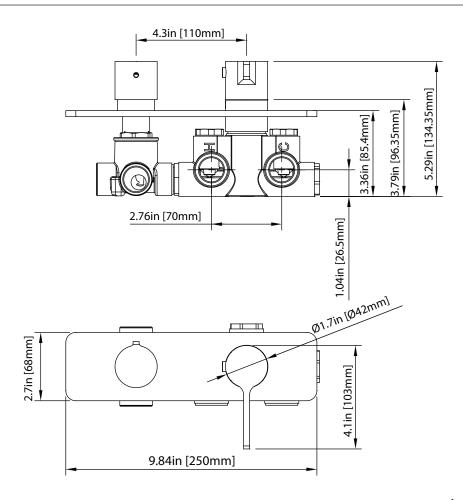



TVH.2705F | 3/4" Thermostatic Valve With 3-Way Diverter & Integrated Volume Control Page 1 of 2





SPECIFICATIONS:

- Turn bottom knob to control temperature.
- Turn top knob to control water flow.
- Thermostatic Valve Flow Rate 8.0 GPM @ 60 PSI
- Extension Available TVH.4101E**

STANDARDS:

• ASME A112.18.1 / CSA B125.1



CALGreen Compliant




Legislation Compliance




ZeroDrip Technology



Technical Diagram



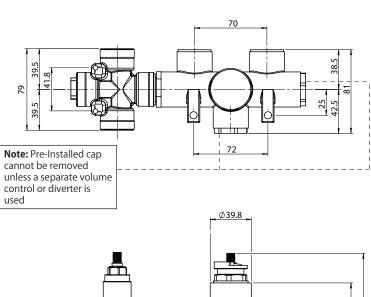





Universal Fixtures ™

TVH.2705F | 3/4" Thermostatic Valve With 3-Way Diverter & Integrated Volume Control Page 20f2




THREE OUPTUT - CAL-GREEN - NO SHARED PORT OPERATION

Diverter Cartridge # - 15100 (Included)

Total 6 Positions as defined below, with **only** 1 port active at one time.

- Position 0 Off No Water Flow
- Position 1 Output B Activated
- Position 2 Off No Water Flow
- Position 3 Output A Activated
- Position 4 Off No Water Flow
- Position 5 Output C Activated

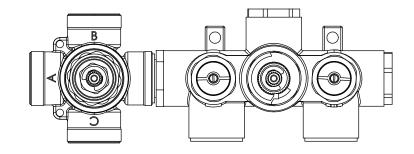

THREE OUPTUT - SHARED PORT OPERATION

Diverter Cartridge # - 15200 (Not Included)

Total 6 Positions as defined below, with 2 ports active at one time.

- Position 0 Off No Water Flow
- Position 1 Output B Activated
- Position 2 Output B+A Activated
- Position 3 Output A Activated
- Position 4 Output C+A Activated
- Position 5 Output C Activated