


**SPECIFICATION:**

JOSAM SERIES 19800 ELASTOMERIC NEOPRENE GASKET  
 CONFORMING TO ASTM-C564 STANDARD FOR WATER-TIGHT SEAL  
 WITH PIPE IN JOSAM INSIDE CAULK OUTLETS (-X).

**GASKET  
 JIFFE JOINT**

SERIES

**19800**

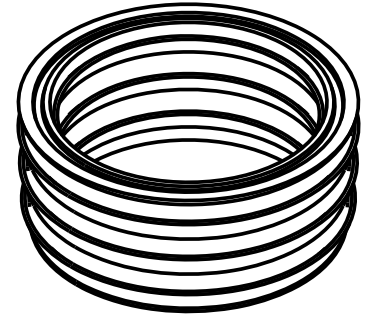

	TYPE NO.	DESIGNATION	FOR PIPE O.D.		A
			MIN.	MAX.	
	19802	2" SW	2.125	2.390	1-1/2
	19803	3" SW	3.125	3.390	1-3/4
	19804	4" SW	4.125	4.390	2-1/4
	19805	5" SW	5.210	5.390	2-1/2
	19806	6" SW	6.210	6.390	2-5/8
	19812	2" XH	2.290	2.470	1-1/2
	19813	3" XH	3.410	3.590	1-3/4
	19814	4" XH	4.410	4.590	2-1/4
	19815	5" XH	5.410	5.590	2-1/2
	19816	6" XH	6.410	6.590	2-5/8
	19825	5" SP	5.550	5.700	2-1/2
	19826	6" SP	6.550	6.700	2-5/8

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

DATE OF LAST CHANGE: 6/14/18

DIMENSIONS ARE SUBJECT TO MANUFACTURERS  
 TOLERANCES AND CHANGE WITHOUT NOTICE.  
 WE CAN ASSUME NO RESPONSIBILITY FOR  
 USE OF SUPERSEDED OR VOID DATA.



MICHIGAN CITY, INDIANA

NOTES