



Buy it for looks. Buy it for life.®

# Specifications

## FAUCET DESCRIPTION

- Metal construction with various finishes identified by suffix
- Flexible supplies with 3/8" compression fittings
- Includes side spray with Duralock™ quick connect system

## OPERATION

- Lever style handle
- Operates with less than 5 lbs. of force

## FLOW

- Spout flow is limited to 1.5 gpm max (5.7 L/min) at 60 psi max

## CARTRIDGE


- 1255 cartridge design
- Nonmetallic/nonferrous and stainless steel material

## STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including ANSI/NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA ♿ for lever handle

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
  - 10 year limited warranty when used in a multifamily installation
  - 5 year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

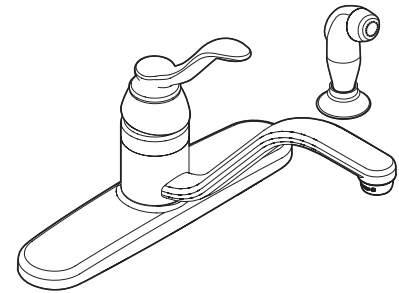

## Banbury™ Single-Handle Lever Kitchen Faucet

**Models:** 7050 (less side spray)  
7051 (with side spray)

**NOTE:** DESIGNED TO BE INSTALLED THROUGH 3 HOLES 1-1/4" (32MM) MIN. DIA. AND 4" (102MM) ON CENTER.

