

Kubos™ Shower System Combination with Diverter Valve

TRIM FEATURES:

- Metal lever handle
- Metal trim plate
- Includes mounting plate and hardware

VALVE FEATURES:

- Brass body construction
- Four port valve with 1/2" -14 NPT male and 1/2" copper sweat inlets, shower and tub outlets
- Pressure balancing and ceramic temperature regulating cartridge with built-in check valves
- Ceramic diverter cartridge allows for transition between two independent settings
- Adjustable temperature limit stop to control maximum temperature setting
- Integral stops allow water shut off for servicing valve
- Supports back-to-back installation
- Includes rough-in template and 1/2" pipe plug

SHOWER FEATURES:

- Included shower head: S-3021 2.5 GPM (9.5 L/min) flow rate
- Included shower arm and flange: S-2560

STOCK FINISHES:



PC BN

TRIM STANDARDS:

- ASME A112.18.1/CSA B125.1 certified

VALVE STANDARDS:

- ASME A112.18.1/CSA B125.1 certified
- ASSE 1016 certified



SHOWER STANDARDS:

- ASME A112.18.1/CSA B125.1 certified




WARRANTY:

Visit www.speakman.com for full product warranty information

- 5 Year Limited Warranty (commercial)
- Limited Lifetime Warranty (residential)



M4X0.7-6g

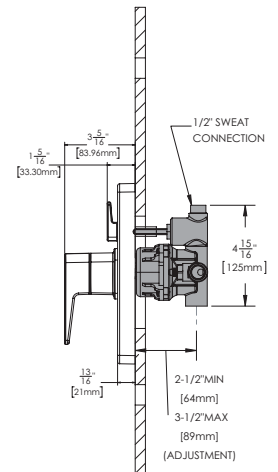

1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. For ADA mounting locations consult ADAAG, ANSI A117.1 or state regulations.

Architect/Engineer Approval Space:

P: 800-537-2107
 F: 800-977-2747
 W: WWW.SPEAKMAN.COM
 R: 01-DECEMBER 2018