**PROFESSIONAL® SERIES** 









## **FEATURES & BENEFITS**

- Pro Harmony® wall hoods add bold, distinct flair to your kitchen and are crafted to complete the ultimate cooking system
- 24" in depth, a perfect companion to Pro Harmony® Ranges and Rangetops
- Powerfully Quiet® system accepts integral, inline, and remote blowers
- Dishwasher-safe stainless steel, commercial-style baffle filters
- Beautiful illumination with multi-level, vivid LED lights

## **ACCESSORIES (OPTIONAL)**

25 ft. Blower Connector Cable - EXTNCB25W

EXTNCB25W - For use with the following inline and remote blowers: VTR630W, VTR1030W, VTR1330W, VTI610W, VTI1010W

Roofplates

RFPLT600P - For use with 600 CFM remote blower VTR630W

RFPLT1000P - For use with 1000 CFM remote blower VTR1030W and 1300 CFM blower VTR1330W

| 6" Tall Duct Cover, 36" Wide                          | DC366W    |
|---|-----------|
| 8' - 9' ceiling Telescoping Duct Cover,<br>36" Wide   | DC3689W   |
| 10' - 12' Ceiling Telescoping Duct Cover,<br>36" Wide | DC361012W |

Built-In Remote Control Panel

REMCPW - Ability to vertically install on cabinetry or wall to control hood in a convenient location

# **GENERAL PROPERTIES**

**Features** 

Multi-Level LED Lights with Fading Transitions, Automatic Mode, Check Filter Reminder Light, Delay Shut-Off

| Tilter Keminder Light, Delay Shat-On                                    |  |  |  |  |
|---|--|--|--|--|
| Operating Mode  | Ducted   |  |  |  |
| Number of Speed Settings  | 4-Stage  |  |  |  |
| Motor Location  | Blower (Sold<br>Separately)                          |  |  |  |
| Number Of Lights  | 2  |  |  |  |
| Bulb Type   | LED  |  |  |  |
| Light Lumens  | 100 – 150  |  |  |  |
| Light Color (°K)  | 3500 – 4000  |  |  |  |
| Total Power Of The Lamps (W)  | 2.4  |  |  |  |
| Damper Included   | Yes  |  |  |  |
| Grease Filter Material  | Washable Stainless<br>Steel                          |  |  |  |
| Grease Filter Type  | Stainless-Steel<br>Commercial Style<br>Baffle Filter |  |  |  |
| Home Connect™ (Wi-Fi Enabled)   | No   |  |  |  |
| TECHNICAL DETAILS   |  |  |  |  |
| Watts (W)   | See Chart on Page 3                                  |  |  |  |
| Current (A)   | See Chart on Page 3                                  |  |  |  |
| Volts (V)   | 120 V  |  |  |  |
| Frequency (Hz)  | 60 HZ  |  |  |  |
| Plug Type   | 120V-3 Prong   |  |  |  |
| DIMENSIONS & WEIGHT   |  |  |  |  |
| Overall Appliance Dimensions<br>(Width Of Canopy Included) (HxWxD) (in) | 18" x 35 <b>15/<sub>16</sub></b> " x 24"             |  |  |  |
| Minimum Required Distance Above Gas /<br>Electric Cooking Surface       | 30" / 30"  |  |  |  |
| Diameter of Air Duct (in) Top   | 10"  |  |  |  |
| Diameter of Air Duct (in) Back  | 10"  |  |  |  |
| Net Weight (lbs)  | 75 lbs   |  |  |  |
| ACCESSORIES (REQUIRED)  |  |  |  |  |

## ACCESSORIES (REQUIRED)


Blower (Sold Separately)

| Biower (Sola Separately)                                     |                     |  |  |  |  |
|--|---------------------|--|--|--|--|
| BLOWER OPTIONS   |                     |  |  |  |  |
| Remote Blower<br>(Mounted to Roof or External Wall)          | VTR630W - 600 CFM   |  |  |  |  |
|  | VTR1030W - 1000 CFN |  |  |  |  |
|  | VTR1330W - 1300 CFM |  |  |  |  |
| Inline Blower<br>(Mounted Between Kitchen and External Wall) | VTI610W - 600 CFM   |  |  |  |  |
|  | VTI1010W - 1000 CFM |  |  |  |  |
| Integrated Blower (Mounted in Hood)                          | VTN630W - 600 CFM   |  |  |  |  |
|  | VTN1090R - 1000 CFM |  |  |  |  |
| WARRANTY   |                     |  |  |  |  |
| Limited Warranty Parts And Labor                             | 2 Year              |  |  |  |  |

Page 1 of 5 3 / 20



**PROFESSIONAL® SERIES** 

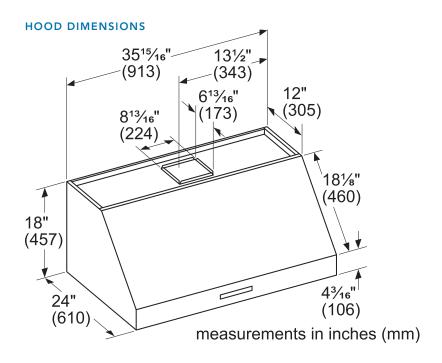


## **OPTIONAL ACCESSORIES**

### **36" WIDE DUCT COVER**

Stainless steel duct cover for wall hood applications






DC3689W TELESCOPING FOR 8'-9' CEILINGS




measurements in inches (mm)



DC361012W TELESCOPING FOR 10'-12' CEILINGS



measurements in inches (mm)



# REMOTE CONTROL PANEL REMCPW



Convenience at your fingertips: The remote control accessory offers the freedom to extend your hood controls to a more reachable spot

Page 2 of 5 3 / 20




| <b>PROF</b> | ESSI | <b>ONAL®</b> | SERIES |
|-------------|------|--------------|--------|
|-------------|------|--------------|--------|

|         |                       |       | ELECTRIC LOAD |          |         |          |         |          |          |
|---------|-----------------------|-------|---------------|----------|---------|----------|---------|----------|----------|
| MODEL   | DESCRIPTION           |       | VTN630W       | VTN1090R | VTI610W | VTI1010W | VTR630W | VTR1030W | VTR1330W |
| PH36HWS | 36" Harmony Wall Hood | Amps  | 4             | 7.4      | 5.9     | 7.8      | 5.9     | 7.8      | 11.3     |
|         |                       | Watts | 480           | 888      | 708     | 936      | 708     | 936      | 1,356    |


# REMOTE BLOWERS (MOUNTED TO ROOF OR EXTERNAL WALL)

### VTR630W-600 CFM




measurements in inches and mm

### VTR1030W-1000 CFM



measurements in inches and mm

### VTR1330W-1300 CFM



measurements in inches and mm


Page 3 of 5 3 / 20

# PH36HWS 24-INCH DEPTH WALL HOOD (36-INCH WIDTH) PROFESSIONAL® SERIES




### INLINE BLOWERS (MOUNTED BETWEEN KITCHEN AND EXTERNAL WALL)

### VTI610W-600 CFM



measurements in inches and mm


### VTI1010W-1000 CFM



measurements in inches and mm


## INTEGRATED BLOWERS (MOUNTED IN HOOD)

# VTN630W-600 CFM



measurements in inches (mm)

# VTN1090R-1000 CFM

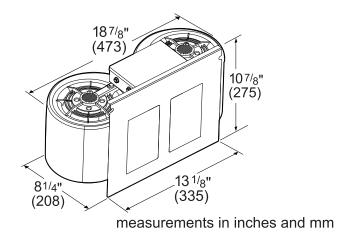


Page 4 of 5 3 / 20




# REMOTE BLOWER ACCESSORIES

### ROOFPLATE-RFPLT600P

**PROFESSIONAL® SERIES** 



### ROOFPLATE-RFPLT1000P



### **EXTNCB25W**

For use with the following Inline and Remote Blowers: VTR630W, VTR1030W, VTR1330W, VTI610W, VTI1010W

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2020 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

Page 5 of 5 3 / 20