

## Commercial Flushometer ADA Floor-Mounted Toilet – 1.0 GPF

### FEATURES

- Floor-mounted
- ADA compliant
- Elongated front bowl
- Optional CeFiONtect™ glaze prevents debris from sticking to ceramic surfaces, making them easier to clean
- Clear glazed trapway coating
- 10"-12" rough-in

### MODELS

- CT705ULNG  
Commercial ADA compliant, floor-mounted toilet with CeFiONtect ceramic glaze
- CT705ULN  
Commercial ADA compliant floor-mounted toilet

### ADDITIONAL ITEMS

- SC534 seat
- SC134 seat

ECOPOWER® FLUSH VALVES	
Exposed	
TET1UA32#CP	1.0 GPF
Exposed 24" Breaker	
TET6UA32#CP	1.0 GPF
Concealed 14" x 12"	
TET2UA32#CP	1.0 GPF
Concealed 4" x 4"	
TET3UA32#SS	1.0 GPF

### COLORS/FINISHES

- Standard  
#01 Cotton



Flush valve sold separately



### PRODUCT SPECIFICATION

The floor-mounted, ADA compliant low consumption siphon jet flushing toilet shall be 1.0 GPF (3.8 LPF) when paired with a 1.0 GPF flush valve. Toilet shall have optional CeFiONtect ceramic glaze. Toilet shall be TOTO Model CT705ULN\_\_\_\_\_.

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant



# CT705ULN(G)

## Commercial Flushometer ADA Floor-Mounted Toilet – 1.0 GPF

### SPECIFICATIONS


<b>Water Use</b>	1.0 GPF (3.8 LPF)
<b>Flush System</b>	Siphon Jet Flushing Action
<b>Water Surface</b>	10-3/4" x 9-1/4"
<b>Water Pressure</b>	Min: 35 psi (Flowing) Max: 80 psi (Static)
<b>Min. Flow Rate</b>	24 GPM
<b>Trap Diameter</b>	1-7/8"
<b>Trap Seal</b>	2-3/8"
<b>Rough-in</b>	12" or 10"
<b>Material</b>	Vitreous China
<b>Warranty</b>	One Year Limited Warranty
<b>Shipping Weight</b>	58 lbs
<b>Shipping Dimensions</b>	26-1/2"L x 9-1/2" W1 x 16-1/4"W2 x 19-1/2"H

### INSTALLATION NOTES

Spuds are unique for TOTO product. For replacement spuds, contact TOTO for part number THU073R.

Can be used with exposed or concealed top inlet flush valves.

### DIMENSIONS

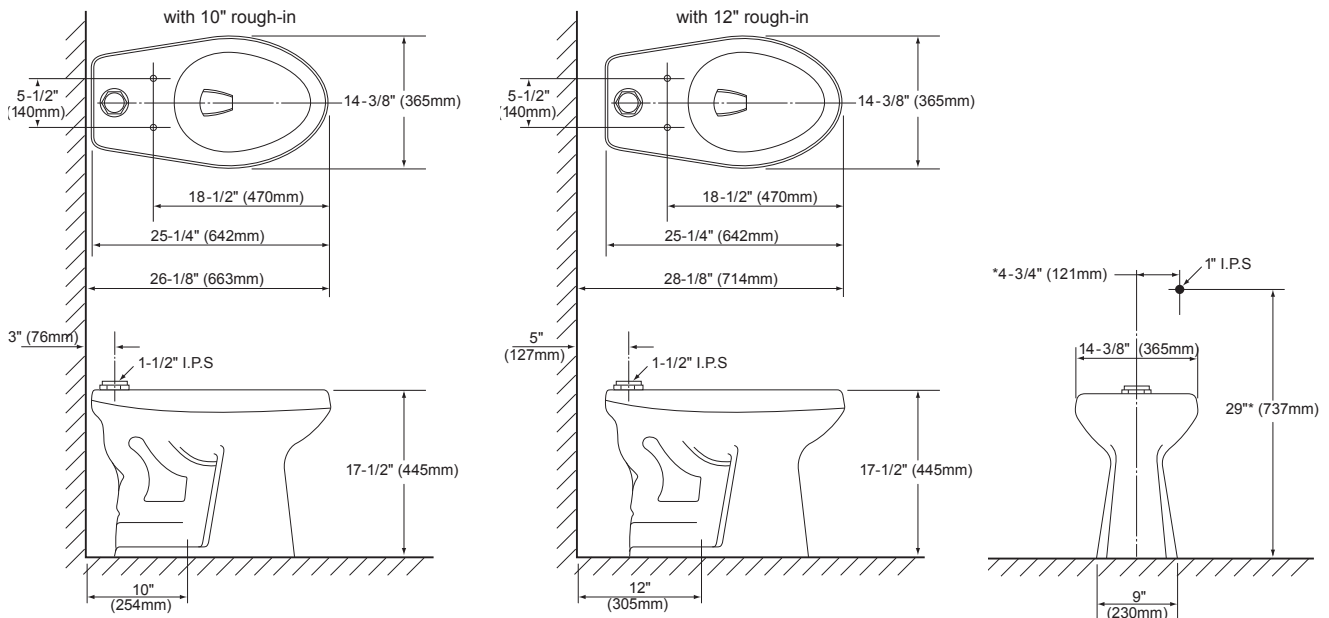

**TOTO**

*These dimensions and specifications are subject to change without notice*