

## Flotation Tub with ZERO DIMENSION®

### FEATURES

- 86-5/8" L x 41-5/16" W x 30-11/16" H
- Constructed with solid surface Galaline® engineered to resist stains, retain heat, and minimize maintenance
- Shaped to simulate a "gravity-less" floating position for ultimate relaxation
- Hydrohands massaging water jets
- Slip-resistant surface
- Adjustable headrest with cascading shoulder warmer
- Mood creating LED Lighting
- Capacitive keypad
- Toe touch drain and push-button design for a smooth, one-piece tub appearance
- 0.5 hp blower
- 77.5 gallon capacity



### COLORS/FINISHES

- #GW Gloss White



### PRODUCT SPECIFICATION

Flotation Tub with ZERO DIMENSION shall be 86-5/8" L x 41-5/16" W x 30-11/16" H. Bath shall be freestanding with drain. Bath shall have Hydrohands massaging water jets. Bath shall have adjustable headrest with cascading shoulder warmer. Bath shall have LED lighting. Bath shall have touch drain. Bath shall have capacitive key pad control. Bath shall have slip resistant surface. Bath shall have solid surface material construction. Bath shall be TOTO Model PJYD2200PWEU#GW.

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.7 / CSA B45.10, ASME A112.18.2 / CSA B125.2, CSA B45.5 / Z124, CSA 22.2 No. 218.2, UL 1795
- Certifications: IAPMO (cUSPC & EGS), State of Massachusetts, and others
- Model Code Compliance: UPC/USPC, IPC, NSPC, NPC Canada
- Complies with CA Prop 65 warning requirements



# PJYD2200PWEU

## Flotation Tub with ZERO DIMENSION®


### SPECIFICATIONS

Size	86-5/8" L x 41-5/16" W x 30-11/16" H
Depth	15-1/2"
Water Depth	12-15/16"
Gallons	77.5 gal to Overflow
Material	Galaline™ Reinforced Marble
Rated Voltage	120V AC, 60Hz
Rated Current	8.8 A
Rated Power Consumption	1000 W
Warranty	Three Year Limited Warranty
Shipping Weight	686 lbs.
Shipping Dimensions	91-1/4" L x 45-11/16" W x 39-11/16" H

### INSTALLATION NOTES

- Floor support under bath must provide a minimum of 42lbs/square foot (206kg/square) meter loading
- An Island Tub Drain (OS&B ITD35/ITD5135) or Drop-in Drain (CG Air CG-DID) is recommended
- Refer to Installation Manual for detail instructions
- Check local codes for additional installation requirements

### DIMENSIONS

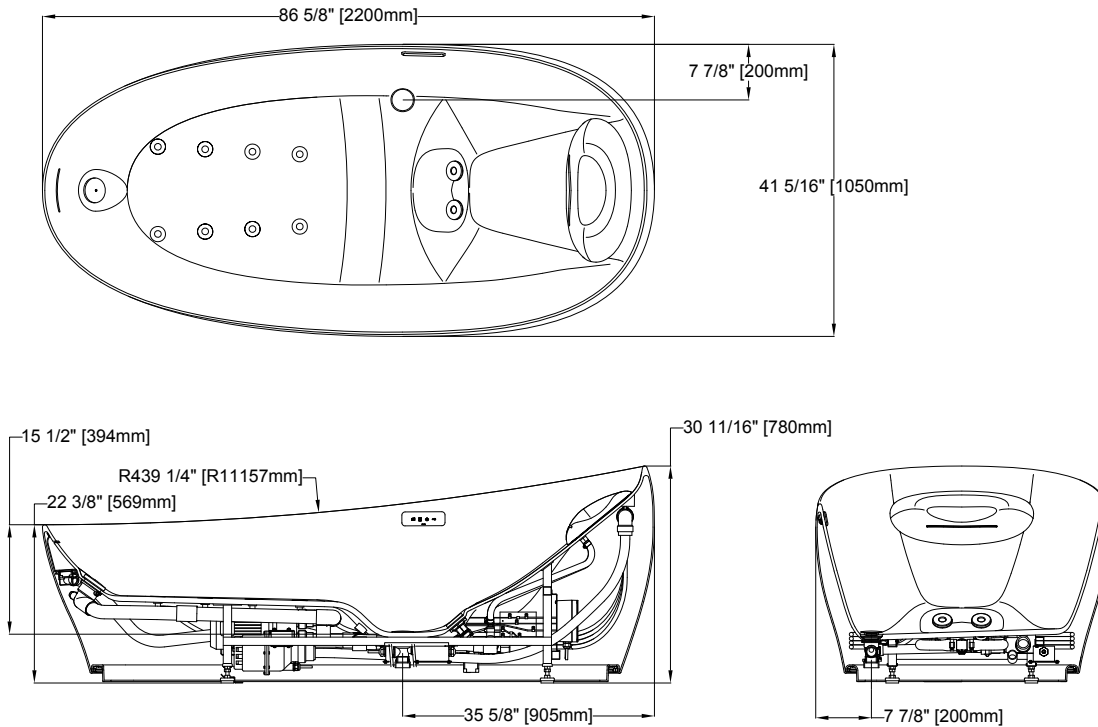

**TOTO®**

*These dimensions and specifications are subject to change without notice*

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

# SS-01381 v.01