

Maxi Lime OEM

Mini-Split Condensate Pump Kit 230v 83835 (ASP-MAXOEM-230)

□ Approval

□ Construction

Project Information:

Job Name:

Location:

Engineer:

Submitted to:

For:

Reference

Submitted by:

Reference:

Submittal Information:

Approval:

Date:

Construction:

Unit #:

Drawing #:

(Sec. I) Product Specifications:

| Pump Length | 3.75" |
|--------------------|--------------------|
| Pump Width | 1.625'' |
| Pump Height | 3.375'' |
| Capacity | 9 GPH @ 0' Head / |
| | 1.9 GPH @ 45' Head |
| Max BTUs | 157,000 |
| Max Head in Feet | 45 |
| Max Temperature | 104°F |
| Max Suction Lif | N/A |
| Sound Level | 35dB(A) |
| Dry Contact Rating | 3A NC |
| Voltage | 208–230v |
| Amperes | .10 |
| Watts | 15 |
| Remote Reservoir | Ν |
| Plenum Rated | Ν |
| Cable Length | 6' |
| <u> </u> | |

Sound level and pump performance varies with voltage frequency.

Pump Selector & Wiring Diagrams Available at

http://www.rectorseal.com/aspenpump.html

(Sec. II) Ordering Information:

Product Code Model Carton Qty Carton Weight

83831 ASPMAXOEM230 1 4


(Sec. III) Carton Contents:

Monobloc Pump Assembly 6"x1/4" i.d. Vinyl Breather Tube Inline Fuse Drain Hose Adaptor Cable Ties (6) Installation Manual Anti-siphon (1) 90° Elbow

(Fig. I) Product Image:



(Fig. II) Typical Pump Locations:

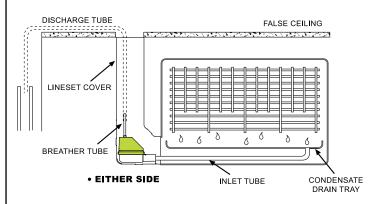

(RectorSeal's products are subject to continuous improvements; RectorSeal reserves the right to modify product design, specifications & information in this data sheet without notice and without incurring any obligations) ASPEN° is a registered trademark of Aspen Oldco Limited Company UK





Maxi Lime OEM

Mini-Split Condensate Pump Kit 230v 83835 (ASP-MAXOEM-230)



Aspen Pump BTU Calculator

| Max | i Lime 230v | 60Hz | Maxi Lime 230v 60Hz |
|------|-------------|--------|---------------------|
| Head | GPH | BTU | 50 |
| 0 | 9 | 157000 | 40 |
| 5 | 7.3 | 126250 | 40 |
| 10 | 6.2 | 106800 | £ 30 |
| 15 | 5.5 | 94500 | 20 |
| 20 | 5 | 86100 | ₽ 20 |
| 25 | 4.5 | 77500 | 10 |
| 30 | 4 | 69000 | |
| 35 | 3.5 | 61000 | 0 |
| 40 | 3 | 52500 | Flow Rate (GPH) |
| 45 | 1.9 | 33250 | |

RectorSeal® 2601 Spenwick Drive - Houston, TX 77055 800-231-3345 rectorseal.com

A CSW Industrials Company. RectorSeal, the logos and other trademarks are property of RectorSeal, LLC, its affiliates or its licensor's and are protected by copyright, trademark and other intellectual property laws, and may not be used without permission. RectorSeal reserves the right to change specifications without prior notice. ©2018 RectorSeal. All rights reserved. R50326-1018