




Special Notes: LED lights. This model is not available with heat lamps. Shown with optional duct cover (sold separately). Optional duct covers are available in standard and custom sizes. Galley rail included.

WIDTH:	42"				
DEPTH:	30"				
HEIGHT:	9"				
CFM:	550				
SONES:	6.0				
AMPS:	4.0				
# LIGHTS:	4				

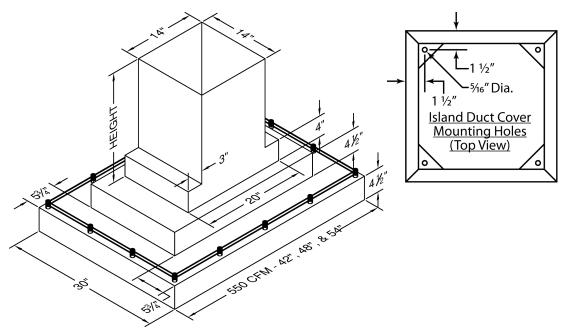

CONNECTION DIAGRAM



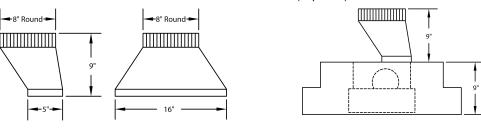

* Exceeding recommended mounting height may compromise performance.

REC. MOUNTING HEIGHT*

Optional Duct Cover

30'

36'

ELECTRICAL/MECHANICAL SPECIFICATIONS FOR BLOWER UNIT

Transition Installed

(Side View)

MODEL	VOLTS	AMPS+	HZ	RPM	CFM SP@0.0"	EQUIV CFM\$	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	MIN. ROUND DUCT SIZE	SONES#	
T200 Island Dual	115	4.0	60	1550	550	900	507	471	431	8" (50 sq. in.)	6.0	

⁺ This model is equipped with LED lighting (one in each corner).

VP565 Standard Transition

(Included)

[#] Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.



^{\$} Because the Magic Lung blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung with other blower units made by other manufacturers, use the "Equivalent CFM".